
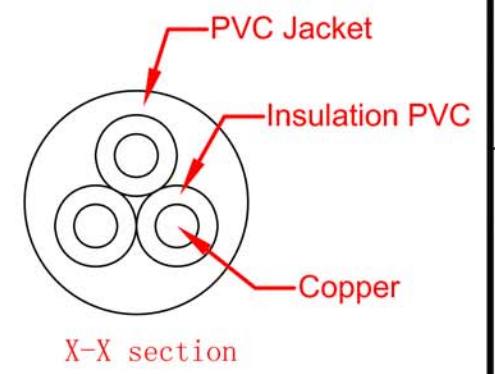
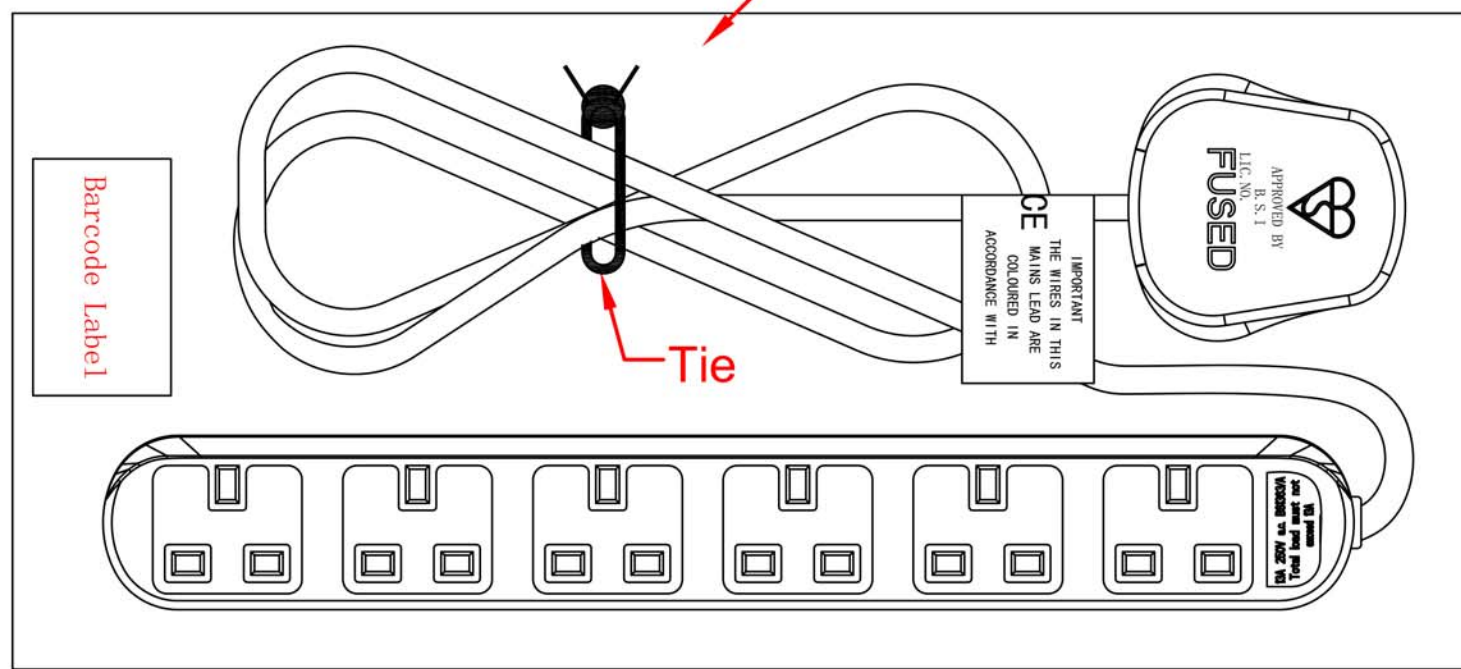


Dimension	0-8	8-25	25-50	50-100	100-200	200-300	∠ (度)
Tolerance	±0.08	±0.10	±0.12	±0.18	±0.20	±0.30	±0.20°
Mark	Modified	Modified Record		Edition	Publish	Approval	Date
				P1			2015-08-12

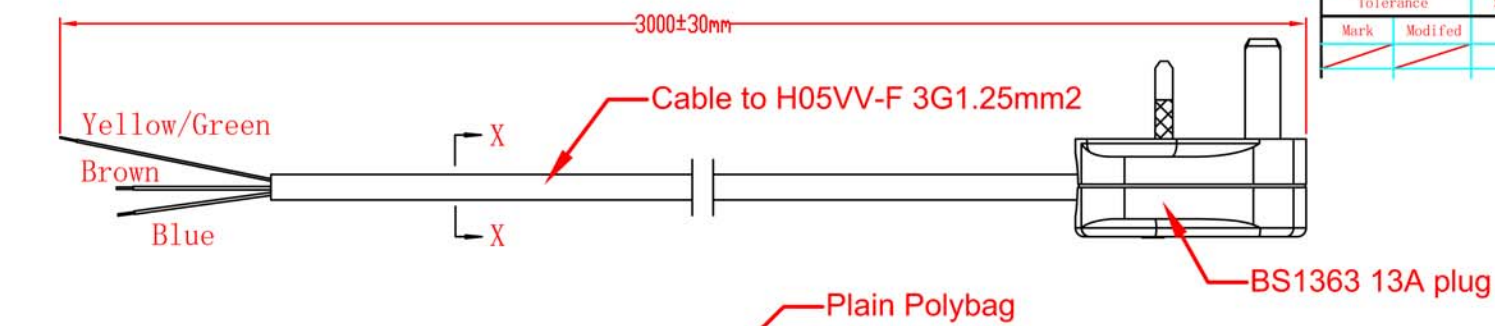

Technical requirements:

1. Plug should be Kitemark certified to BS1363-1, socket meet BS1363-2
2. Cable should be standard of EN50525 or meet equivalent standards
3. Products should meet relevant Rohs directive

DRAW: HB		DATE: 2015-08-12	PRODUCT NAME: 27-6030	<input type="checkbox"/> FIRST PROJECT
DESIGN: HB		DATE: 2015-08-12		<input checked="" type="checkbox"/> THIRD PROJECT
CHECK: HJD		DATE: 2015-08-12	PART NAME:	PAGE:
APPROVAL: HJD		DATE: 2015-08-12		1 OF 1
MATERIAL: xxxx	UNIT: mm	WEIGHT: xxxg	PART NUMBER: XXXXXXXX	EDITION: A3 P1
MATT: xxxx	SCALE: xxxx			