


P/N	L/mm	T/mm
26-2965	2000	30

PIN OUT

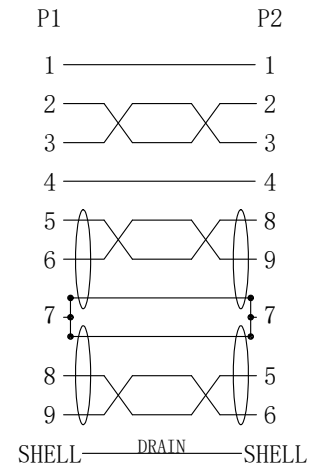

NOTES:

1. OPEN/SHORT/INTERMITTENCE:100%.
2. INSULATION RESISTANCE:DC 300V 0.01S 10MΩ Min
3. CONDUCTIVE RESISTANCE:5Ω Max
4. PRACTICAL TEST:READ/WRITE SPEED≥3.1Gbps
5. ROHS & REACH COMPLIANT

NO.	MATERIAL	DESCRIPTION	QTY.	UNIT																											
④	MOLDED	45P BLACK PVC		G																											
③	MOLDED	LDPE		G																											
②	CONNECTOR	USB3.0 A MALE, GOLD PLATED PIN, BLUE INSULATION, NICKEL PLATED SHELL	2	PCS																											
①	CABLE	[7/0.12TC*1P+D(7/0.12TC)+FAM]*2C+7/0.12TC*1P+7/0.20TC*2C+AL+D(7/0.12BC)+B(96/0.12AM), BLACK PVC JACKET, OD:6.0±0.2mm MARKING:USB3.0 CABLE AWM 20276 80°C 30V VW-1	2000	MM																											
<table border="1"> <tr> <td>Ltemref</td> <td>Quantity</td> <td colspan="3">Title/Name, designation, material, dimension etc</td> <td colspan="3">Article NO./Reference</td> </tr> <tr> <td>Designed by FLY</td> <td>Checkde by HELEN</td> <td>Approved by - date 2025.11.28</td> <td>File name</td> <td>Date 2025.11.28</td> <td>Scale FREE</td> <td colspan="2"></td> </tr> <tr> <td>ANGLE: </td> <td colspan="3" rowspan="2" style="border: 2px solid red;"></td> <td colspan="3">USB3.0 AM TO AM</td> </tr> <tr> <td>UNIT:MM</td> <td>26-2965</td> <td>Edition 1</td> <td>Sheet 1/1</td> </tr> </table>					Ltemref	Quantity	Title/Name, designation, material, dimension etc			Article NO./Reference			Designed by FLY	Checkde by HELEN	Approved by - date 2025.11.28	File name	Date 2025.11.28	Scale FREE			ANGLE:				USB3.0 AM TO AM			UNIT:MM	26-2965	Edition 1	Sheet 1/1
Ltemref	Quantity	Title/Name, designation, material, dimension etc			Article NO./Reference																										
Designed by FLY	Checkde by HELEN	Approved by - date 2025.11.28	File name	Date 2025.11.28	Scale FREE																										
ANGLE:				USB3.0 AM TO AM																											
UNIT:MM				26-2965	Edition 1	Sheet 1/1																									