


NOTE:
 Compatible with USB 3.1 Gen2 Spec 10Gbps standard.
 Supports computer resolutions to 4K@120Hz or 8K@60Hz 4:4:4
 Support maximum power 60W
 No loss of signal
 Hybrid optical cable with fiber and copper wire
 PIN gold plated,shell Nickel plating
 Environmental Specifications:For Indoor use only;
 Operating temperature:-40°C to 70°C
 Minimum bending radius 20mm
 Max.tension force:100N
 5core OM3 Multimode Fiber(high speed data)
 Round cable Black PVC jacket
 RoHS 2.0 & REACH compliant

P/N	L/m	T/m
26-4050/AOC	5	0.1
26-4100/AOC	10	0.2
26-4150/AOC	15	0.3

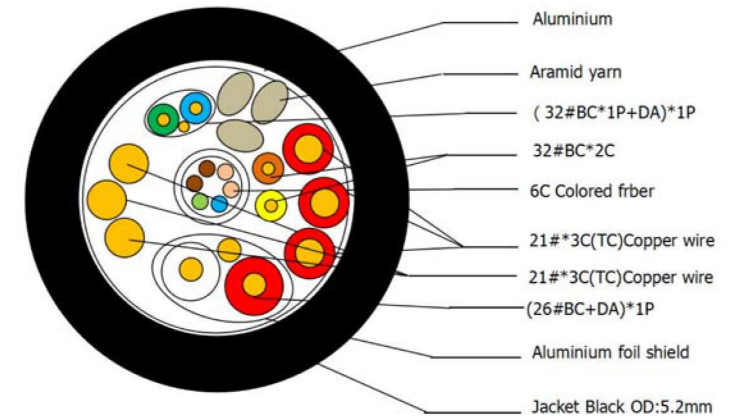

Ltemref	Quantity	Title/Name, designation, material, dimension etc	Article NO./Reference			
Designed by	Checkde by	Approved by - date	File name	Date	Scale	
FLY	HELEN	2024. 08. 08		2024. 08. 08	FREE	
ANGLE:			TYPE C M/M 10G 8K 60W			
UNIT:MM				26-4**0/AOC	Edition	Sheet
				1	1/1	