


P/N	L/mm	T/mm
26-6210	1000	30
26-6220	2000	40

PIN OUT

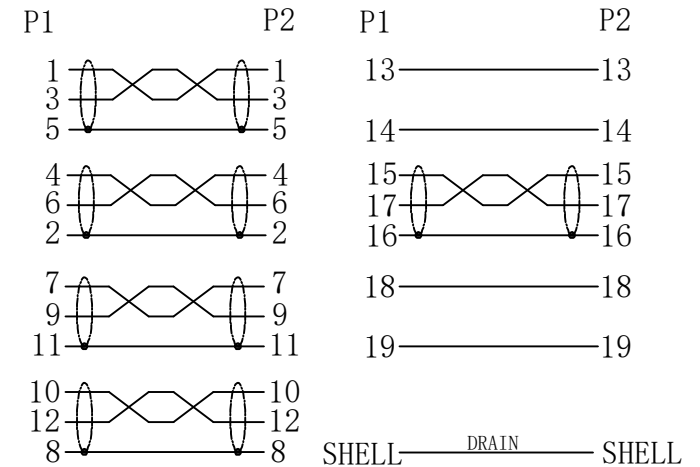

NOTES:

1. OPEN/SHORT/INTERMITTENCE:100%.
2. INSULATION RESISTANCE:DC 300V 0.01S 10MΩ Min
3. CONDUCTIVE RESISTANCE:5Ω Max
4. RESOLUTION:1920*1080P@60Hz
5. RoHS & REACH COMPLIANT

⑧	DUST CAP	DP MALE DUST CAP	1	PCS
⑦	DUST CAP	HDMI A MALE DUST CAP	1	PCS
⑥	MOLDED	45P BLACK PVC		G
⑤	MOLDED	LDPE		G
④	PLASTIC HOOD	DP MALE BLACK PLASTIC HOOD	1	SET
③	CONNECTOR	DP 20PIN MALE, THE PIN GOLD PLATED, BLACK INSULATION, GOLD PLATED SHELL+IC:PS8121E	1	PCS
②	CONNECTOR	HDMI 19PIN MALE, THE PIN GOLD PLATED, BLACK INSULATION, GOLD PLATED SHELL	1	PCS
①	CABLE	[7/0. 10TC*1P+D (7/0. 10TC)+AL+MY]*4+7/0. 10TC*5C+7/0. 10TC*1P+AL+D (1/0. 254BC)+B (80/0. 12AL-MG), BLACK PVC JACKET, OD:6.0±0.2MM, MARKING:HIGH SPEED HDMI [®] CABLE	L	MM
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT

Ltemref	Quantity	Title/Name, designation, material, dimension etc	Article NO./Reference		
Designed by FLY	Checkde by HELEN	Approved by - date 2025. 10. 29	File name	Date 2025. 10. 29	Scale FREE
ANGLE:			DP M-HDMI AM		
UNIT:MM			26-62X0	Edition 1	Sheet 1/1