


NOTES:

1. OPEN/SHORT/INTERMITTENCE: 100%.
2. RESOLUTION: 1920*1080P@60Hz
3. RoHS & REACH COMPLIANT

PIN OUT

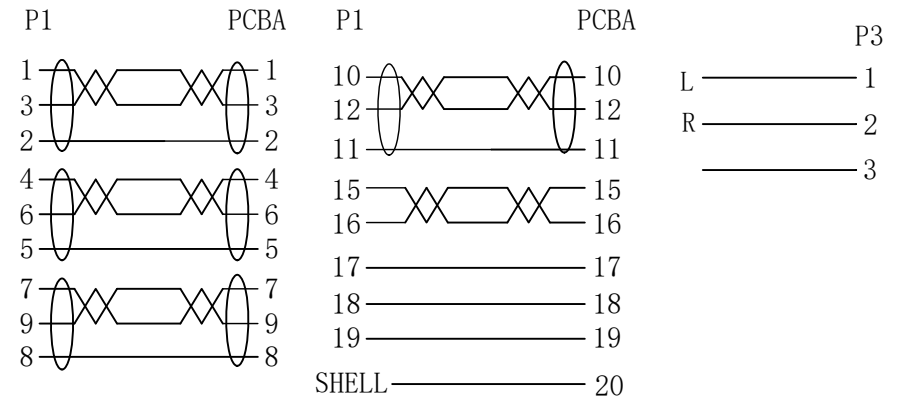

⑨	DUST CAP	HDMI A MALE DUST CAP	2	PCS
⑧	MOLDED	45P BLACK PVC		G
⑦	MOLDED	LDPE	1	PGS
⑥	THUMB SCREW	#40-40 (Ø2.3*L55 BLACK PVC)		
⑤	CONNECTOR3	3.5MM AUDIO MALE WHIT NI PLATED	1	PCS
④	CONNECTOR2	VGA M, GOLD PLATED PIN, BLACK INSULATION, NICKEL PLATED SHELL+PCBA (IC:AG6201)	1	PCS
③	CONNECTOR1	HDMI A MALE, GOLD PLATED PIN, BLACK INSULATION, NICKEL PLATED SHELL	1	PCS
②	CABLE 2	(7/0.12BC)*2C+S (28*0.10BC) BLACK PVC JACKET OD:3.0±0.2MM	1	PCS
①	CABLE 1	[1/0.254BC*1P+D (1/0.254BC)+AL/MYLAR]*5C+ (1/0.254BC)*4C+AL+D (1/0.254BC)+B (80/0.12ALM), BLACK PVC JACKET OD:6.0±0.2MM, MARKING:High Speed HDMI Cable with Ethernet E***兄 AWM STYLE 20276 80° C 30V VW -1	L	MM
NO.	MATERIAL	DESCRIPTION	QTY.	UNIT

Ltemref	Quantity	Title/Name, designation, material, dimension etc			Article NO./Reference	
Designed by FLY	Checkde by HELEN	Approved by - date 2025.11.06	File name	Date 2025.11.06	Scale FREE	
ANGLE:				HDMI AM-VGA M+AUDIO		
UNIT:MM				26-7020/VGA		Edition 1