


NOTE:

Material:

PIN gold plated, shell gold plated, Blue rubber core
 Hybrid optical cable with fiber and copper wire
 4core OM3 Multimode Fiber (high speed data) and 7core copper cable
 Input IC: SL82811 from company Silicon Line
 Output IC: SL82821 from company Silicon Line
 Round cable Black PVC jacket
 ROHS 2.0 & REACH compliant

Electrical performance:

Supports computer resolutions to 4K@120Hz@4:4:4 or 8K@60Hz 4:4:4
 Plug and Play
 Support HDCP2.2@ARC
 Self-detecting function for EDID information
 No loss of signal
 Environmental Specifications: For Indoor use only
 Operating temperature: -40°C to 70°C
 Minimum bending radius 20mm
 Max. tension force: 100N
 Powered via HDMI devices

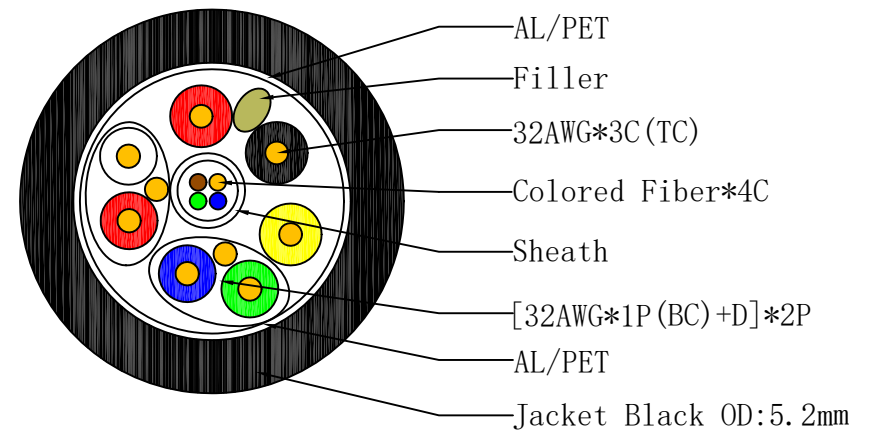

Ltemref	Quantity	Title/Name, designation, material, dimension etc			Article NO./Reference	
Designed by FLY	Checkde by HELEN	Approved by - date 2025. 06. 03	File name	Date 2025. 06. 03	Scale FREE	
ANGLE:				HDMI2.1 AM-AM AOC		
UNIT:MM				Edition 1	Sheet 1/1	