


**NOTE:**

**Material:**

PIN gold plated, shell gold plated, Blue rubber core  
 Hybrid optical cable with fiber and copper wire  
 4core OM3 Multimode Fiber (high speed data) and 7core copper cable  
 Input IC: SL82811 from company Silicon Line  
 Output IC: SL82821 from company Silicon Line  
 Round cable Black PVC jacket  
 ROHS 2.0 & REACH compliant

**Electrical performance:**

Supports computer resolutions to 4K@120Hz@4:4:4 or 8K@60Hz 4:4:4  
 Plug and Play  
 Support HDCP2.2@ARC  
 Self-detecting function for EDID information  
 No loss of signal  
 Environmental Specifications: For Indoor use only  
 Operating temperature: -40°C to 70°C  
 Minimum bending radius 20mm  
 Max. tension force: 100N  
 Powered via HDMI devices

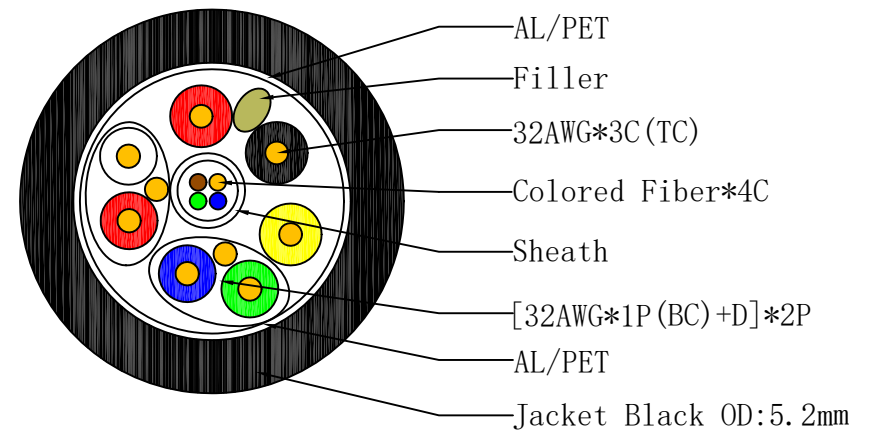

Ltemref	Quantity	Title/Name, designation, material, dimension etc			Article NO./Reference	
Designed by FLY	Checkde by HELEN	Approved by - date 2025. 06. 03	File name	Date 2025. 06. 03	Scale FREE	
ANGLE:				HDMI2.1 AM-AM AOC		
UNIT:MM				Edition 1	Sheet 1/1	