


| 标记 | 处数 | 分区 | 更改 | 日期 |
|----|----|----|----|----|
| | | | | |

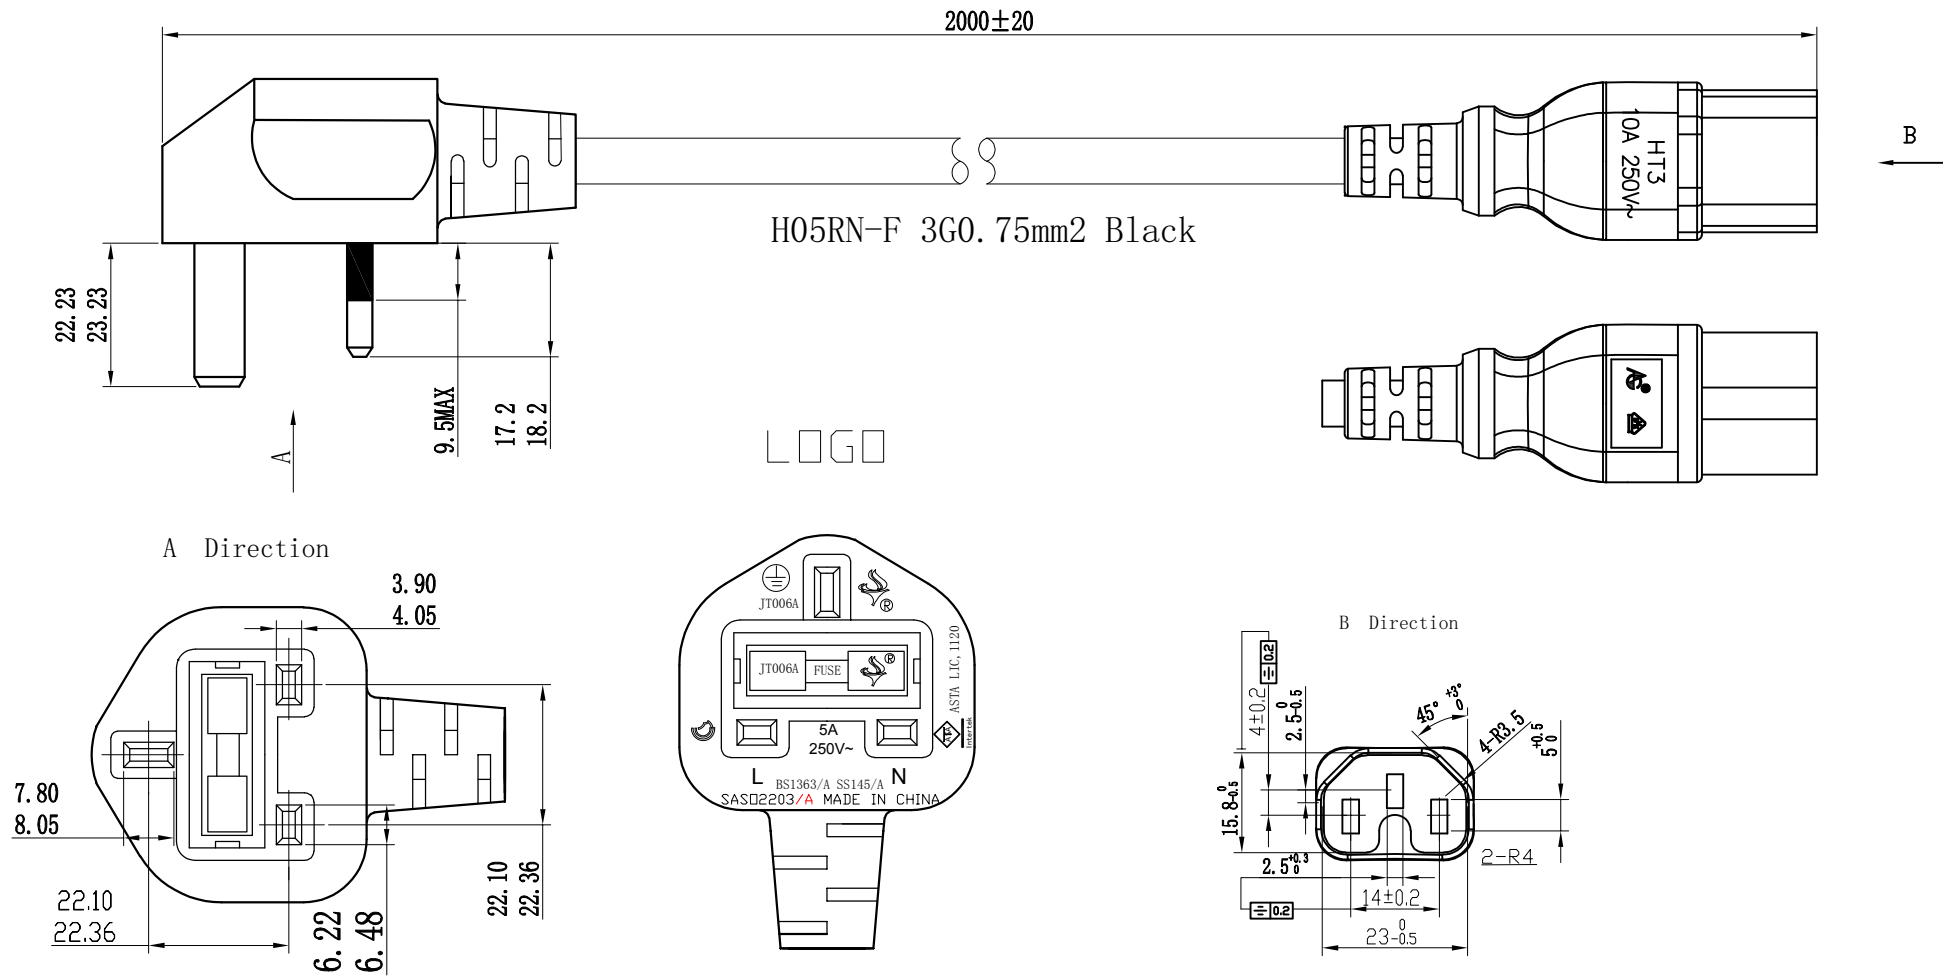

Notes:

1. Plug: JT006A/HT3 Clear injection no scratch and dirt;
2. Cable: H05RN-F 3G0.75mm² Jacket $\phi 7.0 \pm 0.1$ Conductor $24 \times 0.198 \pm 0.004$ Core $\phi 2.4 \pm 0.1$
Cable Mark: $\triangleleft VDE \triangleright$ H05RN-F 3G0.75mm²
3. Test: Hi-pot: Inner Voltage AC2500V/1S External Voltage AC4000V/1S
current leakage 1mA, insulation resistance no less than 5M Ω , no strike out;

| 尺寸标注 | | 公差 | | 第三角度投影 | | 比例 | | 第X张 共X张 | |
|-----------|----------|---------------|------|----------------------------|-----|-------|----|---------------------------|----|
| DIMENSION | | TOLERANCE | | THE THIRD ANGLE PROJECTION | | RATIO | | SHEET NO. OF TOTAL SHEETS | |
| LENGTH | ANGLE | VERSION | A | PROPORTION | 1:1 | UNIT | mm | HAPS | A4 |
| <200 | ±0.1 | ±0.5° | 版本 | 比例 | 1:1 | UNIT | mm | HAPS | A4 |
| 200~500 | ±0.3 | | 文件位置 | | | | | | |
| 500~800 | ±0.5 | | 图号 | | | | | | |
| >800 | ±1.0 | | 图号 | | | | | | |
| 设计 | DESIGN | 产品名称 | | JT006A/HT3 | | | | | |
| 审核 | AUDIT | PRODUCER NAME | | | | | | | |
| 批准 | APPROVAL | | | | | | | | |