


Dimension	0-8	8-25	25-50	50-100	100-200	200-300	< (度)
Tolerance	±0.08	±0.10	±0.12	±0.18	±0.20	±0.30	±0.20°
Modified Record							Date
Mark				P1	HB	HJD	2026-08-20

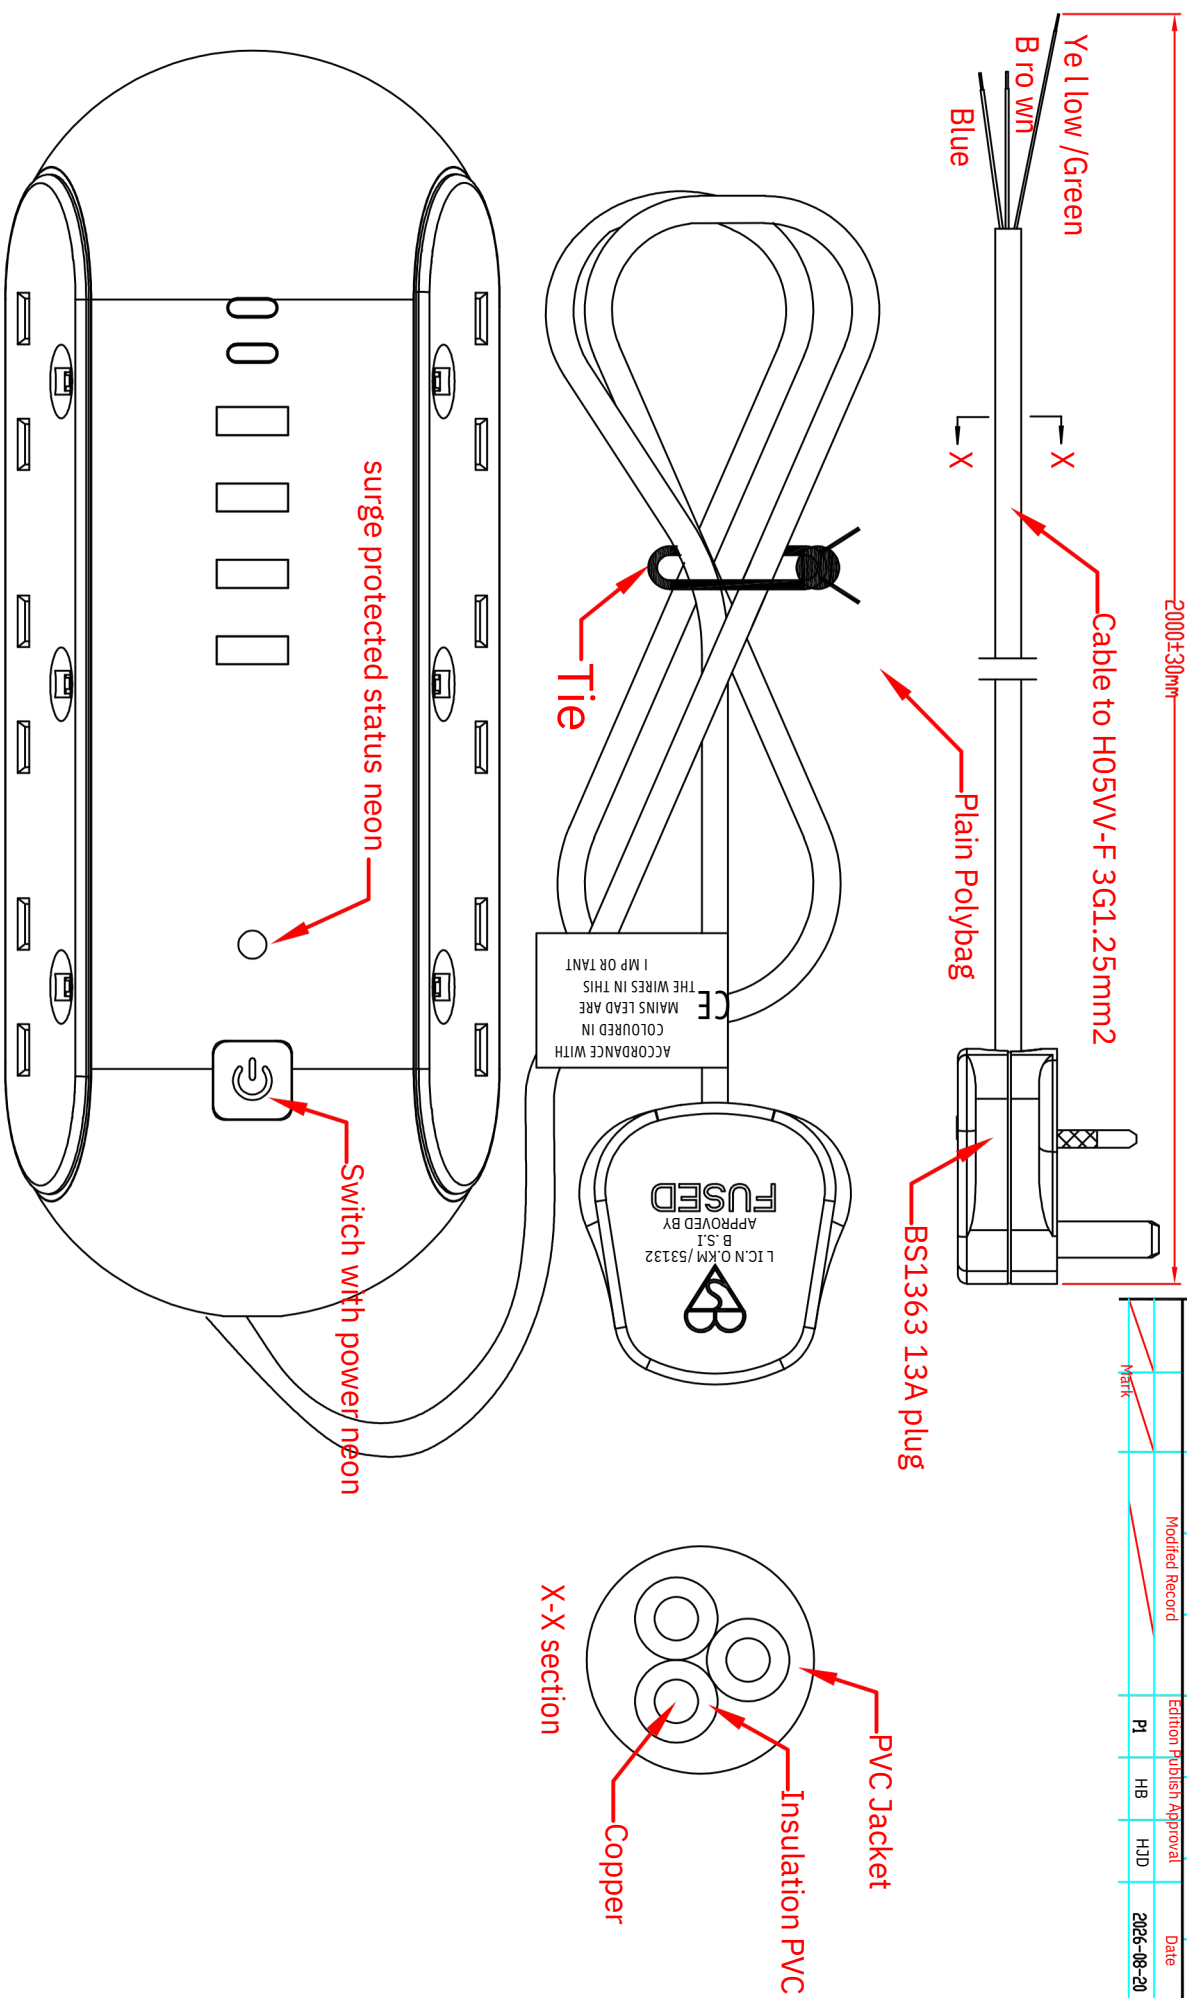

Technical requirements:

1. Plugs should be certified to BS1363-1, Socket meet BS1363-2 standard
2. Cables should be standard of EN50525 or meet equivalent standards
3. Products should meet relevant standard
4. USB charging port PD65Watts, 4A+2C
5. Surge protected, Switched

DESIGN TO MEET THE SPECIFICATION

PRODUCT NAME:				☐ FIRST PRODUCT	
DRAWN BY: HB				☒ DATE: 2026-08-20	
DESIGN: HB				☒ DATE: 2026-08-20	
APPROVED BY: HB				☒ DATE: 2026-08-20	
MATERIAL: xxxx				☒ DATE: 2026-08-20	
MATT: xxxx				☒ DATE: 2026-08-20	
SCALE: xxxx				☒ DATE: 2026-08-20	
WEIGHT: xxxg				☒ DATE: 2026-08-20	
PART NAME: 27-6020S/USB				☒ DATE: 2026-08-20	
PART NUMBER: XXXXXXXX				☒ DATE: 2026-08-20	
A3				P1	