
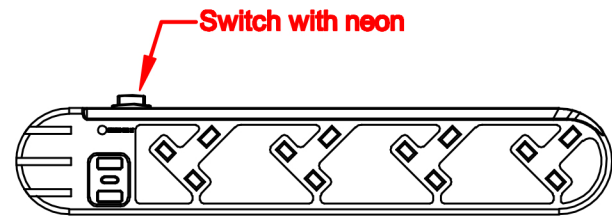
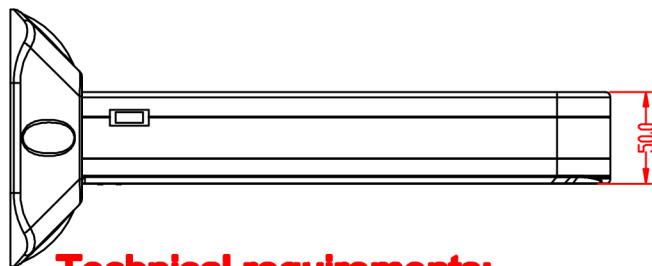
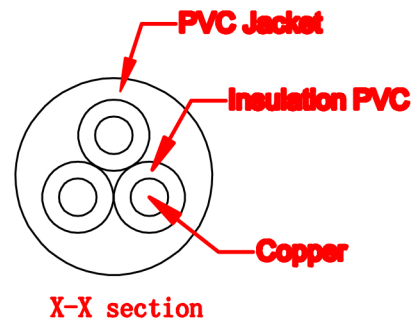

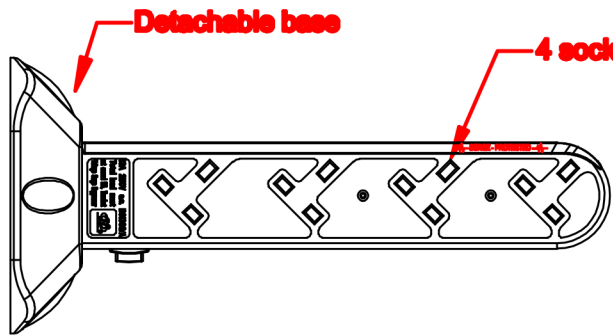


Dimension	0-8	8-25	25-50	50-100	100-200	200-300	< (B)
Tolerance	±0.08	±0.10	±0.12	±0.18	±0.20	±0.30	±0.20*
Mark	Modified	Modified Record		Edition/Publish Approval		Date	
				P1		2024-03-21	

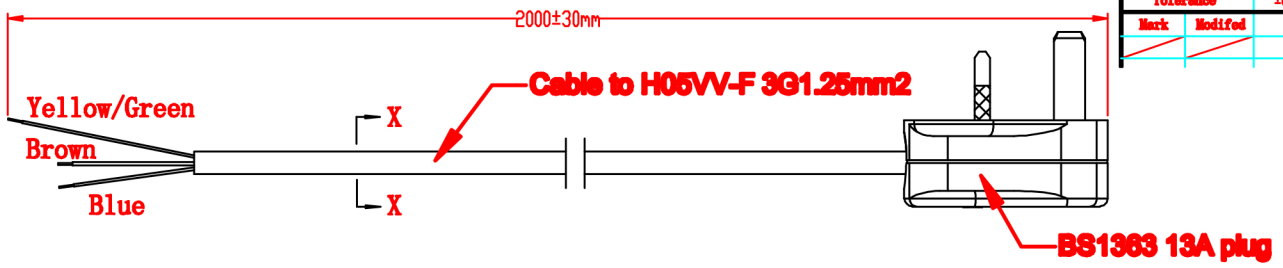

Technical requirements:

1. Plug should be Kitemark certified to BS1363-1, socket meet BS1363-2
2. Cable should be standard of BS EN50625 or meet equivalent standards
3. Products should meet relevant Rohs directive
4. Color black

USB Input: AC 250V 50-60Hz 0.8A
USB Output: (Max output 20.0W), detail as below:
Type-C(single): 5V---3A 9V---2.22A 12V---1.67A
Type-A(single): 5V---3A 9V---2.0A 12V---1.5A
Multi-ports: 5V---3A

DRAW: EB			DATE: 2024-03-21		PRODUCT NAME:		☐ FIRST PROJECT
DESIGN: EB			DATE: 2024-03-21				☒ THIRD PROJECT
CHECK: EJD			DATE: 2024-03-21		PART NAME:		PAGE:
APPROVAL: EJD			DATE: 2024-03-21				1 OF 1
MATERIAL: xxxx			UNIT: mm	WEIGHT: xxxg	PART NUMBER:		REVISION:
MATT: xxxx			SCALE: xxx:xxx	xxxg			A3 P1