



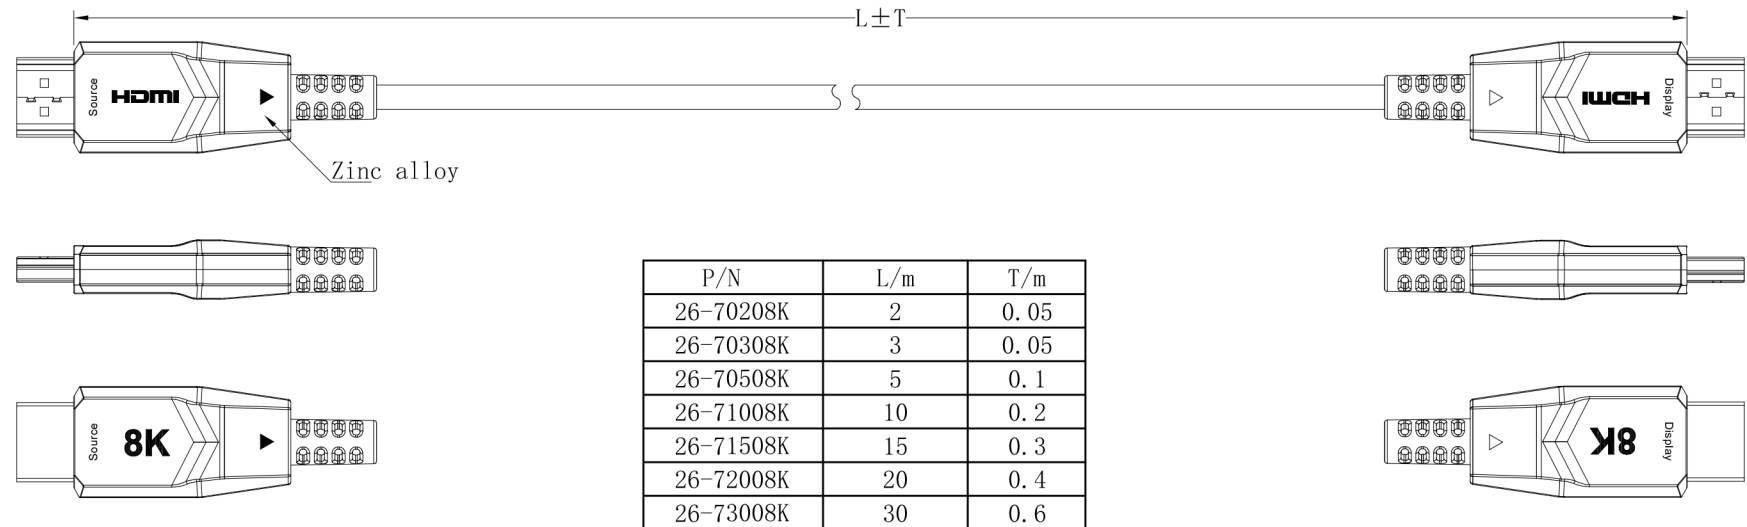

NOTE:
Material:
PIN gold plated, shell gold plated, Blue rubber core
Hybrid optical cable with fiber and copper wire
4core OM3 Multimode Fiber (high speed data) and 7core copper cable
Input IC: SL82811 from company Silicon Line
Output IC: SL82821 from company Silicon Line
Round cable Black PVC jacket
ROHS 2.0 & REACH compliant
Electrical performance:
Supports computer resolutions to 4K@120Hz@4:4:4 or 8K@60Hz 4:4:4
Plug and Play
Support HDCP2.2@ARC
Self-detecting function for EDID information
No loss of signal
Environmental Specifications: For Indoor use only
Operating temperature: -40°C to 70°C
Minimum bending radius 20mm
Max. tension force: 100N
Powered via HDMI devices

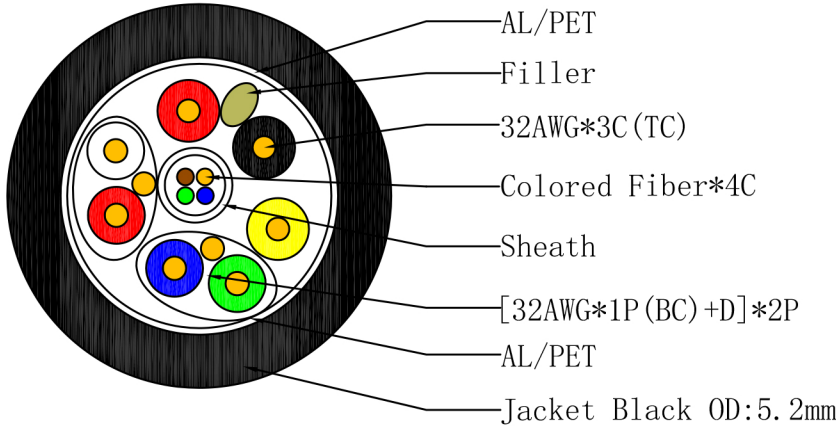

Ltemref	Quantity	Title/Name, designation, material, dimension etc			Article NO./Reference		
Designed by		Checked by	Approved by – date 2025. 06. 03	File name	Date 2025. 06. 03	Scale FREE	
ANGLE: 				HDMI2.1 AM-AM AOC			
UNIT:MM					Edition 1	Sheet 1/1	